


# SF-C2P

## CONSTRUCTION

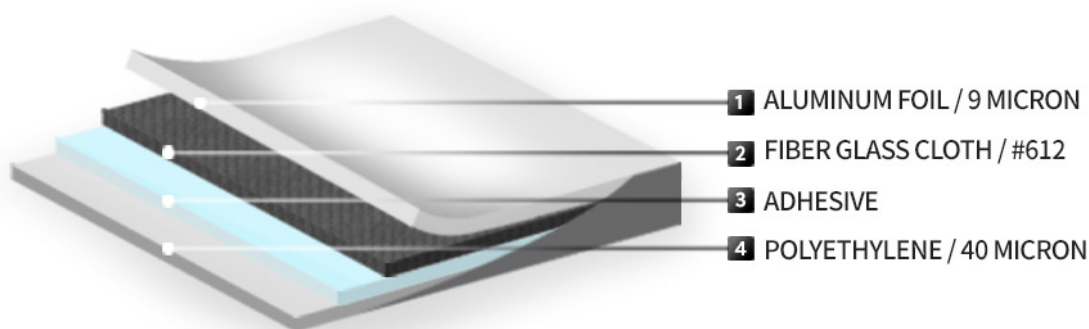

## TYPICAL PHYSICAL PROPERTIES

ITEM	UNIT	TEST METHOD	TEST RESULT
WEIGHT	g/m <sup>2</sup>	ASTM D646	162
TENSILE STRENGTH	N/15mm	ASTM D 828:16, C.R.E	MD: 392.8
			XD: 371.2

### Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness:  $\pm 10\%$ ; Width:  $\pm 3\text{mm}$ ; Length:  $\pm 0.5\%$ .
3. The products should be stored at room temperature, kept from wet and kept away heat source.

## SAMMIN INDUSTRIAL Co., Ltd.

- 14, Gongdan 1-daero 363beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea 15077
- TEL: +82 31 498 5533
- FAX: +82 31 498 8998
- EMAIL: sammin@samminind.com