


# SK-D1P

## CONSTRUCTION

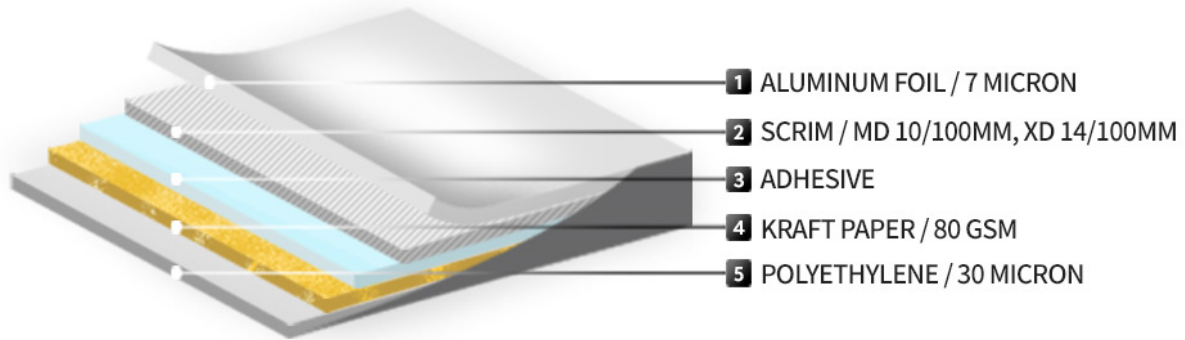

## TYPICAL PHYSICAL PROPERTIES

ITEM	UNIT	TEST METHOD	TEST RESULT
WEIGHT	g/m <sup>2</sup>	ASTM D646	132.2
TENSILE STRENGTH	N/15mm	ASTM D 828:16, C.R.E	MD: 143.8 N/15mm CD: 115.4 N/15mm
BURSTING STRENGTH	N/15mm	ASTM D 828	374
WATER VAPOUR PERMEABILITY	g/(m <sup>2</sup> /24h)	ASTM E96/E96M:2016, PROCEDURE E DESICCANT METHOD	LESS THAN 0.4

### Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness:  $\pm 10\%$ ; Width:  $\pm 3\text{mm}$ ; Length:  $\pm 0.5\%$ .
3. The products should be stored at room temperature, kept from wet and kept away heat source.

## SAMMIN INDUSTRIAL Co., Ltd.

- 14, Gongdan 1-daero 363beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea 15077
- TEL: +82 31 498 5533
- FAX: +82 31 498 8998
- EMAIL: sammin@samminind.com