


# SK-P

## CONSTRUCTION

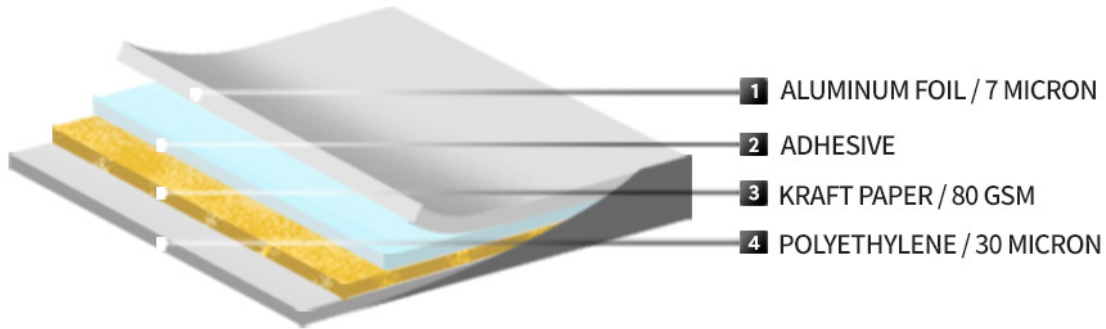

## TYPICAL PHYSICAL PROPERTIES

ITEM	UNIT	TEST METHOD	TEST RESULT
WEIGHT	g/m <sup>2</sup>	ASTM D 646	122.4
WATER VAPOUR PERMEABILITY	g/(m <sup>2</sup> ·24h)	KS T 1305	Below 0.4
BURSTING STRENGTH	kPa	ASTM D 774	106
TENSILE STRENGTH	kN/m	ASTM D 828	XD : 1.93
			MD : 3.26
DIMENSION STABILITY	%	ASTM D 1204	XD: -0.25
			MD: -0.23

### Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness:±10%; Width:±3mm; Length: ±0.5%.
3. The products should be stored at room temperature, kept from wet and kept away heat source.

### **SAMMIN INDUSTRIAL Co., Ltd.**

- 14, Gongdan 1-daero 363beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea (429-851)
- TEL: +82 31 498 5533
- FAX: +82 31 498 8998
- EMAIL: sammin@samminind.com