


SPK-D4

CONSTRUCTION

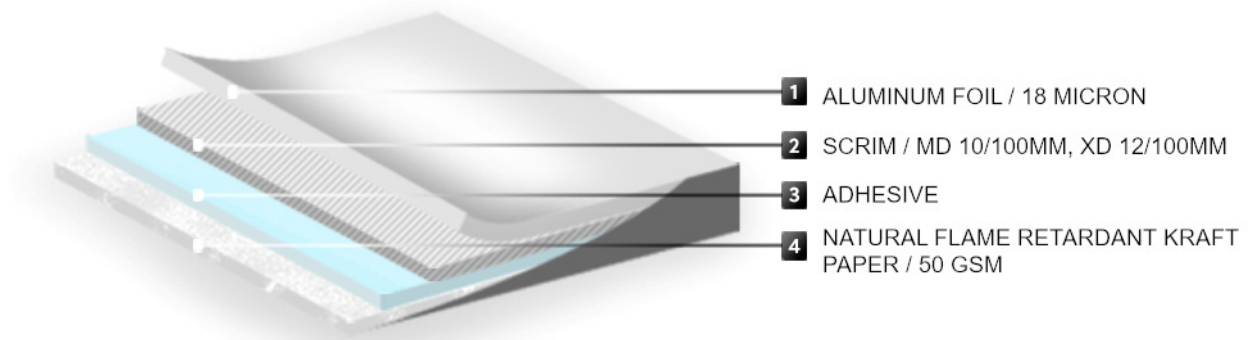

TYPICAL PHYSICAL PROPERTIES

ITEM	UNIT	TEST METHOD	TEST RESULT
WEIGHT	g/m ²	ASTM D 646	113
WATER VAPOUR PERMEABILITY	perm	ASTM E 96	0.02
BURSTING STRENGTH	kPa	ASTM D 774	352
TENSILE STRENGTH	N/15mm	ASTM D 828	XD : 48 MD : 89
DIMENSION STABILITY	%	ASTM D 1204	-0.1

Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness: $\pm 10\%$; Width: $\pm 3\text{mm}$; Length: $\pm 0.5\%$.
3. The products should be stored at room temperature, kept from wet and kept away heat source.

SAMMIN INDUSTRIAL Co., Ltd.

- 14, Gongdan 1-daero 363beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea (429-851)
- TEL: +82 31 498 5533
- FAX: +82 31 498 8998
- EMAIL: sammin@samminind.com