


SWK-DN2

CONSTRUCTION

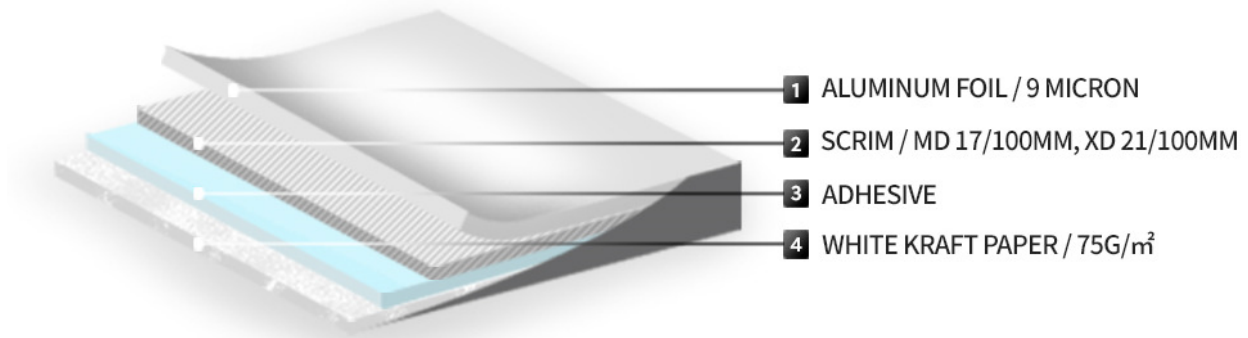

TYPICAL PHYSICAL PROPERTIES

ITEM	UNIT	TEST METHOD	TEST RESULT
WEIGHT	g/m ²	ASTM D 646	115.3
WATER VAPOUR PERMEABILITY	Perm	ASTM E96	0.018
BURSTING STRENGTH	Psi	ASTM D 774	65.7 Psi
TENSILE STRENGTH	lb/in	ASTM D 828	XD : 39.4
			MD : 62.8
DIMENSION STABILITY	%	ASTM D 1204	MD: -0.05

Remarks:

1. The data above are typical results and subject to change without notice.
2. Tolerance: Weight and Thickness:±10%; Width:±3mm; Length: ±0.5%.
3. The products should be stored at room temperature, kept from wet and kept away heat source.

SAMMIN INDUSTRIAL Co., Ltd.

- 14, Gongdan 1-daero 363beon-gil, Siheung-si, Gyeonggi-do, Republic of Korea (429-851)
- TEL: +82 31 498 5533
- FAX: +82 31 498 8998
- EMAIL: sammin@samminind.com